


ViFi Switching Cloud Keys & Gateways Camera Security Door Access Phone System New

Cloud Keys & Gateways > Gateway Lite

Datasheet Installation Guide Marketing Images



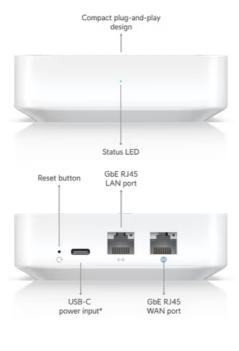

*5V DC, 3A USB-C adapter included.

Mechanical

Dimensions 98 x 98 x 30 mm (3.9 x 3.9 x 1.2")

Weight 320 g (11.3 oz)

Enclosure materials Polycarbonate

Hardware

Processor Dual-core ARM® Cortex®-A53 at 1 GHz

Memory information 1 GB DDR3L

Management interface Ethernet

Bluetooth 5.1

Networking interface (1) GbE RJ45 WAN port

(1) GbE RJ45 LAN port

Power method USB type C (5V/3A)

Supported voltage range 100-240V

Max. power consumption 3.83W

Operating temperature -10 to 40° C (14 to 104° F)

Operating humidity 5 to 95% noncondensing

Certifications CE, FCC, IC

Gateway Features

Performance WiFi QoS with UniFi APs

Application, domain, and country-based QoS Application and device type identification Additional internet failover with LTE Backup

Internet quality and outage reporting

Next-generation security Application-aware firewall rules

Signature-based IPS/IDS threat detection Content, country, domain, and ad filtering VLAN/subnet-based traffic segmentation

Full stateful firewall

Advanced networking License-free SD-WAN*

WireGuard, L2TP and OpenVPN server

OpenVPN client

OpenVPN and IPsec site-to-site VPN

One-click Teleport* and Identity Enterprise VPN**

Policy-based WAN and VPN routing

DHCP relay Customizable DHCP server IPv6 ISP support

*When paired with a Cloud Key or Official UniFi Hosting.

Application Requirements

UniFi Network

Version 8.0.7 and later

Stay in Touch

Email Subscribe

Terms and Conditions | Terms of Service | Privacy Policy | Return Policy | Cookies Settings

© 2024 Ubiquiti, Inc. All rights reserved.

^{**}When paired with a Cloud Key.